

1

2

3



4

5

6

A

B

C



D

A

B


C

D

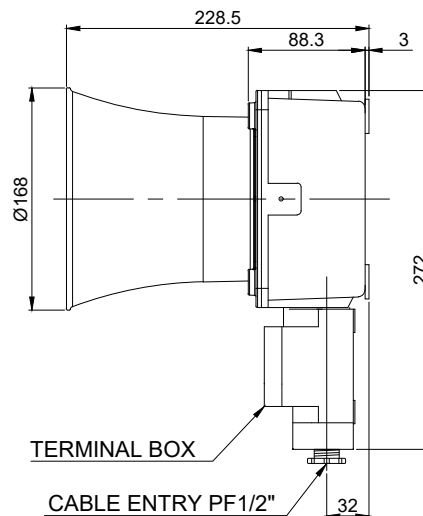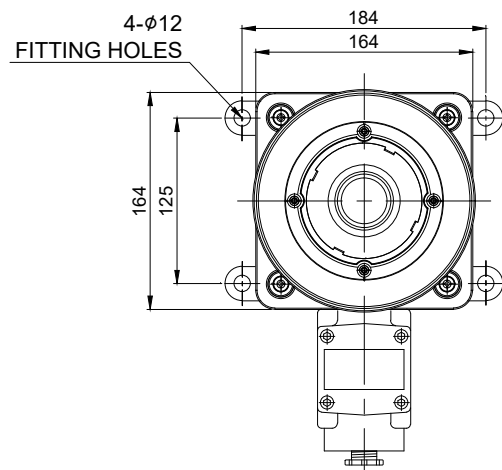

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO		SEWN50T		
MATERIAL		HOUSING-AL		
		HORN HOUSING-PC		
USE VOLT.	CURRENT	DC12V	2.440A	
		DC24V	1.186A	
		AC110V	0.244A	
		AC220V	0.122A	
KIND OF SOUND		WS	5 Warning Sounds	
		WP	5 Special Warning Sounds	
		WM	5 Melodies	
		WA	5 Alarms	
		WV	5 Customizable sounds	
VOLUME		MAX. 120dB		
PROTECTION GRADE		WATER & DUST PROOF IP56		
CABLE ENTRY		PF1/2"		
COLOR OF HOUSING		MUNSELL NO. 7.5BG 7/2		

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY J.Y. KIM	CHKD BY Y.H. JOO	CHKD BY -	APRV BY J.W. KIM	VIEW 3	DATE 2021.04.30	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
	400~1000	±0.3	±0.8	±2	±4							
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. SEWN50T_OUT			
	10~50	±0°30'		±1°	±2°				SCALE N/S	SIZE A4	REV 00	SHEET 1/1
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							

1

2

3



4

5

6

A4(297X210)