


LAYER	L
1	148
2	204
3	260
4	316
5	372

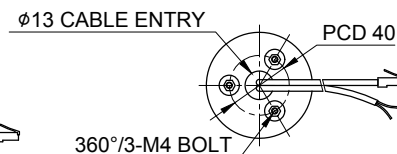

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			QT70ML-ETN				
MATERIAL			HOUSING-PC				
			LENS-PC				
			COVER-PC				
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()				
KIND OF FUNCTION			USE VOLT.	STEADY	FLASHES	STROBE	REVOLVING
LED MODULE	USE VOLT.	LAYER 1 CURRNET (MAX.)	DC12V	0.100A	0.100A	0.120A	0.080A
			DC24V	0.050A	0.050A	0.120A	0.080A
			AC110V	0.020A	0.020A	-	-
			AC220V	0.020A	0.020A	-	-
WARNING SOUND MODULE	USE VOLT.	CURRNET (MAX.)	DC12V	0.220A			
			DC24V	0.120A			
DC12V			0.220A				
DC24V			0.120A				
ALARM MODULE			DC12V	0.220A			
			DC24V	0.120A			
PROTECTION GRADE			WATER & DUST PROOF IP65				
CABLE ENTRY			ø8 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			LED SIGNAL TOWER LAMP				

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1			TITLE QT70ML-ETN OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5			MODEL QT70ML-ETN					
	120~400	±0.2	±0.5	±1.2	±2.5			DWG. NO. QT70ML-ETN_OUT					
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°				SCALE N/S SIZE A4 REV 00 SHEET 1/1					
	10~50	±0°30'	±1°	±2°									
	50~120	±0°20'	±0°30'	±1°									
	120~400	±0°10'	±0°13'	±0°30'									

Qlight

A4(297X210)