


LAYER	L
1	186
2	282
3	378

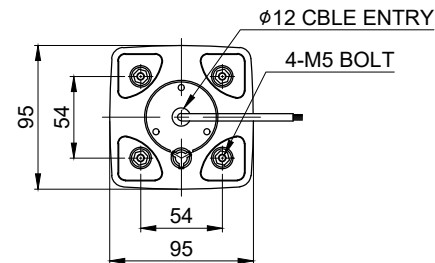

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	⊙	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		Y.C.KO	J.H.PARK	J.K.HAN	J.K.HAN	3	2020.09.22.
	6~30	±0.1	±0.2	±0.5	±1		TITLE			MODEL		
	30~120	±0.15	±0.3	±0.8	±1.5		SJ			SJ		
	120~400	±0.2	±0.5	±1.2	±2.5		OUTLINE DRAWING			DWG. NO.		
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4					SJ_OUT		
	0~10	±1°		±1°30'	±3°					SCALE		
	10~50	±0°30'		±1°	±2°					SIZE	REV	SHEET
	50~120	±0°20'		±0°30'	±1°					N/S	00	1/1
	120~400	±0°10'		±0°13'	±0°30'					A4		

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			SJ			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			REFLECTOR-HEAT RESISTING ABS			
COLOR OF LENS			RED(), AMBER(), GREEN()			
REV. PER MIN.			120 ~ 140			
USE VOLT.	BULB	CURRENT	DC12V	5W	0.488A	LAYER1
			DC24V		0.310A	LAYER1
			AC110V		0.102A	LAYER1
			AC220V		0.051A	LAYER1
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44			
CABLE ENTRY			ø12 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			BULB REVOLVING WARNING LIGHT			