




LAYER	L
1	186
2	282
3	378

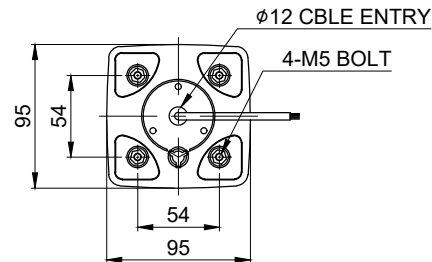

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			SJL			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			REFLECTOR-HEAT RESISTING ABS			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    )			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.185A	LAYER1
			DC24V			LAYER1
			AC110V		0.065A	LAYER1
			AC220V		0.030A	LAYER1
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44			
CABLE ENTRY			φ12 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/ FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY Y.C.KO	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2020.09.22.
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1	TITLE  SJL OUTLINE DRAWING		MODEL  SJL				
	30~120	±0.15	±0.3	±0.8	±1.5				DWG. NO.  SJL_OUT			
	120~400	±0.2	±0.5	±1.2	±2.5					SCALE N/S	SIZE A4	REV 00
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°							
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							